

HILTI ANCHORS FOR ATTACHMENTS TO HOLLOW CORE CONCRETE PANELS





INTRODUCTION

Hollow core concrete panels are used in many types of structures including office buildings, hotels, multi family residential units and others. The ease of jobsite construction makes hollow core concrete panels a convenient base material between floors of multi story structures. Other building elements, including partitons, supports, mechanical and electrical equipment, plumbing and other piping must be attached to or hung from these panels. Hilti provides a variety of anchoring systems for reliable connection to hollow core concrete panels. Hilti systems include several screw anchors (KH-EZ, KH-EZ P, KH-EZ I, and KH-EZ E), internally threaded flush anchors (HDI-P TZ, HDI-P) and adhesive anchors (HIT HY-270).

This document is a supplement to the Hilti North American Product Technical Guide, Volume 2, Anchor Fastening Technical Guide, Edition 22 (PTG Ed. 22). Please refer to the publication in its entirety, which is available at www.hilti.com or www.hilti.ca, for complete details including data development, product specifications, general suitability, installation, corrosion and spacing and edge distance guidelines.

KWIK HUS-EZ AND KWIK HUS-EZ P SCREW ANCHOR PRODUCT DESCRIPTION

KWIK HUS EZ carbon steel anchors


| Anchor System | Features and Benefits | |
|---------------|---------------------------------------|--|
| | Carbon Steel 1/4"-3/8" KWIK HUS-EZ | OSHA 1926.1153 Table 1 compliant installation options including the Hilti SafeSet[™] hollow drill bit technology Easy installation using impact tool or torque wrench Product and length identification marks facilitate quality control after installation Through fixture installation improves productivity and accurate installation |
| | Carbon Steel 1/4" KWIK HUS EZ P | Thread design enables quality setting and exceptional load values in wide variety of base material strengths ¼" diameter available in hex head and pan head styles Anchor is fully removable Anchor diameter is same as drill bit diameter. No special diameter bit required |

INSTALLATION PARAMETERS

Table 1 — KWIK HUS-EZ and KWIK HUS-EZ P specifications

| | Quarter | | Nominal anchor diameter | | | |
|----------------------------------|--------------------------|-------|-------------------------|-------------|-------------|--|
| Setting information | Symbol | Units | 1/4 | | 3/8 | |
| Head style | | | Hex head | Pan head | Hex head | |
| Nominal bit diameter | d _{bit} | in. | 1/4 3/8 | | | |
| Minimum base material thickness | h _{min} | in. | | | | |
| Minimum Fixture hole diameter | d _h | in. | 3, | 1/2 | | |
| Minimum anchor spacing | S _{min} | in. | | 4-1/8 | | |
| Minimum edge distance | C _{min} | in. | | 3-3/4 | | |
| Installation torque ¹ | т | ft-lb | 1 | 8 | 19 | |
| | T _{inst} | (Nm) | (2 | (24) (26 | | |
| Maximum impact wrench torque | - | ft-lb | | 114 | | |
| rating ² | T _{impact, max} | (Nm) | | (155) | | |
| Wrench or Torx bit size | | in. | 7/16 | T30 | 9/16 | |

Figure 1 — Installation of Hilti KWIK HUS-EZ (KH-EZ) and KWIK HUS-EZ P (KH-EZ P) in hollow core concrete panels

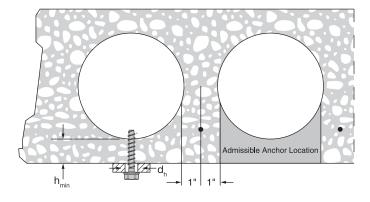

1 T_{int} is the maximum installation torque that may be applied with a torque wrench. 2 Because of variability in measurement procedures the published torque of an impact

2 Because of variability in measurement procedures, the published torque of an impact tool may not correlate properly with the above setting torques. Over torquing can damage the anchor and/or reduce its holding capacity.

DESIGN INFORMATION

Table 2 — Hilti KWIK HUS-EZ (KH-EZ) and KWIK HUS-EZ P (KH-EZ P) loads in hollow core concrete panels^{1,2}

| Anchor Diameter (inches) Min. effective embedment h _{ef} (inches) | | Anchor Diameter | Allowable loads, lb (kN) ³ | | | | Ultimate lo | oad Ib (kN) | |
|---|-------|-----------------|---------------------------------------|-------|-------|---------|-------------|-------------|--------|
| | | Tension | | Shear | | Tension | | Shear | |
| 1/4 | 1-1/8 | 400 | (1.8) | 610 | (2.7) | 1600 | (7.1) | 2440 | (10.9) |
| 1/4 | 1-3/8 | 525 | (2.3) | 770 | (3.4) | 2100 | (9.3) | 3080 | (13.7) |
| 2./9 | 1-1/8 | 435 | (1.9) | 890 | (4.0) | 1740 | (7.7) | 3560 | (15.8) |
| 3/8 | 1-3/8 | 590 | (2.6) | 1405 | (6.3) | 2360 | (10.5) | 5620 | (25.0) |

The admissable anchor location must be established to prevent damage to the prestressed cable during the drilling process. Verify the location and height of the cable with the hollow core
plank supplier to confirm admissable anchor location.
 Minimum compressive strendth of prestressed concrete is 7.000 psi. Published results represent the average results conducted in local base materials. Due to variations in materials and

Minimum compressive strength of prestressed concrete is 7,000 psi. Published results represent the average results conducted in local base materials. Due to variations in materials and dimensional configurations, on-site testing is required to determine the actual performance

3 Allowable loads calculated with a factor of safety of 4.

ORDERING INFORMATION

| Description | Hole Diameter | Total Length without Anchor Head | Qty (pcs) / Box |
|---------------------|---------------|--|-----------------|
| KH-EZ 1/4"x1-7/8" | 1/4" | 1-7/8" | 100 |
| KH-EZ 1/4"x2-5/8" | 1/4" | 2-5/8" | 100 |
| KH-EZ 1/4"x3" | 1/4" | 3" | 100 |
| KH-EZ 1/4"x3-1/2" | 1/4" | 3-1/2" | 100 |
| KH-EZ 1/4"x4" | 1/4" | 4" | 100 |
| KH-EZ P 1/4"x1-7/8" | 1/4" | 1-7/8" | 100 |
| KH-EZ P 1/4"x2-5/8" | 1/4" | 2-5/8" | 100 |
| KH-EZ 3/8"x1-7/8" | 3/8" | 1-7/8" | 50 |
| KH-EZ 3/8"x2-1/8" | 3/8" | 2-1/8" | 50 |
| KH-EZ 3/8"x3" | 3/8" | 3" | 50 |
| KH-EZ 3/8"x3-1/2" | 3/8" | 3-1/2" | 50 |
| KH-EZ 3/8"x4" | 3/8" | 4" | 50 |
| KH-EZ 3/8"x5" | 3/8" | 5" | 30 |

KWIK HUS-EZ I AND KWIK HUS-EZ E SCREW ANCHOR PRODUCT DESCRIPTION

KWIK HUS EZ I and KWIK HUS-EZ E carbon steel anchors

| Anchor System | Features and Benefits | |
|---------------|--|--|
| | Carbon Steel 1/4", 3/8" KWIK HUS-EZ I | OSHA 1926.1153 Table 1 compliant installation options including the Hilti SafeSet[™] hollow drill bit technology Easy installation using impact tool or torque wrench Product and length identification marks facilitate quality control after installation |
| | | Thread design enables quality setting and exceptional load values in wide variety of base material strengths |
| | | 1/4" diameter available in internally and externally threaded head styles |
| | Carbon Steel 1/4" KWIK | Anchor is fully removable |
| | HUS EZ E | Anchor diameter is same as drill bit diameter. No special diameter bit required |

INSTALLATION PARAMETERS

Table 3 — KWIK HUS-EZ I and KWIK HUS-EZ E specifications

| O attinue information | 0 milest | Units | Noi | minal anc | hor diame | eter |
|-----------------------------------|-------------------------------|-------|-----------------|-----------|-----------|-------|
| Setting information | Symbol | Units | | 1/4 | 3/8 | |
| Head style | | | KH-EZ E | | KH-EZ I | |
| Nominal bit diameter | d _{bit} | in. | | 1/4 | | 3/8 |
| Threaded rod diameter | d _{rod} | in. | N/A | 1/4 | 3/8 | 1/2 |
| Minimum base material thickness | h _{min} | in. | 1-1/8 | | | |
| Minimum anchor spacing | S _{min} | | 4-1/8 | | | |
| Minimum edge dis- tance | C _{min} | | 3-3/4 | | | |
| Installation torque ¹ | т | ft-lb | | 18 | | 40 |
| | T _{inst} | (N-m) | | (24) | | (54) |
| Maximum impact | т | ft-lb | | 1 | 14 | |
| wrench torque rating ² | T _{impact, max} (Nm) | | (155) | | | |
| Wrench size | | in. | 1/2 3/8 1/2 11, | | | 11/16 |

1 T_{inst} is the maximum installation torque that may be applied with a torque wrench.

2 Because of variability in measurement procedures, the published torque of an impact tool may not correlate properly with the above setting torques.
Our transition of the property descent the published torque of the published torque of

Over torquing can damage the anchor and/or reduce its holding capacity.

Figure 2 — Installation of Hilti KWIK HUS-EZ I (KH-EZ I) and KWIK HUS-EZ E (KH-EZ E) in hollow core concrete panels

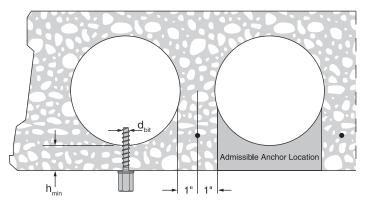


Table 4 — Hilti KWIK HUS-EZ I and KWIK HUS-EZ E loads in hollow core concrete panels^{1,2}

| Anchor Diameter | Hanger rod | Min. effective | | Allowable lo | ads, Ib (kN) | | Ultimate load Ib (kN) | | | |
|--------------------|----------------|--------------------------|----------------------|--------------|--------------------|-------|-----------------------|--------|-------|--------|
| (inches) | size | h _{ef} (inches) | Tension ³ | | Shear ³ | | Tension | | Shear | |
| | 14.00.100 | 1-1/8 | 400 | (1.8) | 215 | (1.0) | 1600 | (7.1) | 860 | (3.8) |
| 4 /4 | 14-20 UNC | 1-3/8 | 525 | (2.3) | 585 | (2.6) | 2100 | (9.3) | 2340 | (10.4) |
| 1/4 | | 1-1/8 | 400 | (1.8) | 295 | (1.3) | 1600 | (7.1) | 1180 | (5.2) |
| | 3/8-16 UNC | 1-3/8 | 525 | (2.3) | 665 | (3.0) | 2100 | (9.3) | 2660 | (11.8) |
| 0.10 | 3/8 1/2-13 UNC | 1-1/8 | 435 | (1.9) | 370 | (1.6) | 1740 | (7.7) | 1480 | (6.6) |
| 3/8 | | 1-3/8 | 590 | (2.6) | 985 | (4.4) | 2360 | (10.5) | 3940 | (17.5) |

1 The admissable anchor location must be established to prevent damage to the prestressed cable during the drilling process. Verify the location and height of the cable with the hollow core plank supplier to confirm admissable anchor location.

2 Minimum compressive strength of prestressed concrete is 7,000 psi. Published results represent the average results conducted in local base materials. Due to variations in materials and dimensional configurations, on-site testing is required to determine the actual performance Allowable loads calculated with a factor of safety of 4.

3

ORDERING INFORMATION

| Description | Thread diameter | Thread length | Drill bit diameter | Qty/box |
|-----------------------------|--------------------|---------------|-----------------------|---------|
| KWIK HUS-EZ 1/4x1-5/8 I 1/4 | 1/4 | 3/8 | 1/4 | 100 |
| KWIK HUS-EZ 1/4x2-1/2 1/4 | 1/4 | 3/8 | 1/4 | 100 |
| KWIK HUS-EZ 1/4x1-5/8 3/8 | 3/8 | 7/16 | 1/4 | 100 |
| KWIK HUS-EZ 1/4x2-1/2 3/8 | 3/8 | 7/16 | 1/4 | 100 |
| KWIK HUS-EZ 1/4x1-5/8 E 3/8 | 3/8 | 1 | 1/4 | 100 |
| KWIK HUS-EZ 3/8x2-1/8 1/2 | 1/2 | 1/2 | 3/8 | 100 |

HDI-P DROP-IN ANCHORS PRODUCT DESCRIPTION

HDI-P Drop-in Anchors

| Anchor System | Features and Benefits |
|----------------------|--|
| HDI-P Drop-in Anchor | Optimized anchor length to allow reliable fastenings in hollow core panels, precast plank and post tensioned slabs |
| | Shallow drilling enables fast installation |
| | Lip provides flush installation, consistent anchor depth and easy rod alignment |
| | HSD-G 3/8 setting tool with hand guard leaves mark on flange when anchor is set properly to enable inspection and verification of proper expansion |

INSTALLATION PARAMETERS


Table 5 — HDI-P specifications

| Catting information | Cumhal | Unite | Nomina | I anchor d | iameter | |
|---------------------------------|------------------|-------|--------|------------|---------|--|
| Setting information | Symbol | Units | 1/4 | 3/8 | 1/2 | |
| Nominal bit diameter | d _{bit} | in. | 3/8 | 1/2 | 5/8 | |
| Threaded rod diameter | d _{rod} | in. | 1/4 | 3/8 | 1/2 | |
| Minimum base material thickness | h _{min} | in. | 1-3/8 | | | |
| | 0 | in. | 5/8 | 3/4 | 1 | |
| Anchor length | l | (mm) | (15.9) | (19.1) | (25.4) | |
| | | in. | 5/8 | 3/4 | 1 | |
| Hole depth in base material | h _o | (mm) | (15.9) | (19.1) | (25.4) | |
| Minimum anchor spacing | S _{min} | in. | | 4-1/8 | · | |
| Minimum edge distance | C _{min} | in. | | 3-3/4 | | |

1 The Admissible Anchor Location must be established to prevent damage to the prestressed cable during the drilling process. Verify the location and height of the cable with the hollow core plank supplier to confirm Admissible Anchor Location.

with the hollow core plank supplier to confirm Admissible Anchor Location.
Minimum compressive strength of hollow core panels is 7,000 psi at the time of installation. The minimum thickness h_{min} is 1-3/8 inches.

Figure 3 — Installation of Hilti HDI-P in hollow core concrete panels

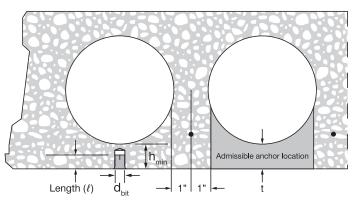

| Nominal | | | | | | /able loads, lb (kN)³ | | | timate lo | ads lb (k | N) |
|--------------------------------|-----|--------------|------------------------|---------|-------|-----------------------|-------|---------|-----------|-----------|--------|
| Anchor Diameter (inches) | | ngth (mm) | Bit Diameter in. | Tension | | Shear | | Tension | | Sh | ear |
| 1/4 | 5/8 | (15.9) | 3/8 | 310 | (1.4) | 455 | (2.0) | 1,550 | (6.9) | 2,275 | (10.1) |
| 3/8 | 3/4 | (19.1) | 1/2 | 420 | (1.9) | 800 | (3.6) | 2,100 | (9.3) | 4,000 | (17.8) |
| 1/2 | 1 | (25.4) | 5/8 | 620 | (2.8) | 1100 | (4.9) | 3,100 | (13.8) | 5,500 | (24.5) |

Table 6 — Hilti HDI-P loads in hollow core concrete panels^{1,2}

1 The admissable anchor location must be established to prevent damage to the prestressed cable during the drilling process. Verify the location and height of the cable with the hollow core plank supplier to confirm admissable anchor location.

2 Minimum compressive strength of prestressed concrete is 7,000 psi. Published results represent the average results conducted in local base materials. Due to variations in materials and dimensional configurations, on-site testing is required to determine the actual performance. Allowable loads calculated with a factor of safety of 5.

3

ORDERING INFORMATION

HDI-P anchor

| Description | Bit diameter | Qty / box |
|-------------|--------------|-----------|
| HDI-P 1/4 | 3/8 | 100 |
| HDI-P 3/8 | 1/2 | 100 |
| HDI-P 1/2 | 5/8 | 50 |

Setting tools for HDI-P anchors HDI

| Description |
|---|
| HST-P 1/4 Hand Setting Tool |
| HST-P 3/8 Hand Setting Tool |
| HSD-G 3/8 Hand Setting Tool with hand guard |
| HST-P 1/2 Hand Setting Tool |
| |

HDI-P TZ FLUSH ANCHORS PRODUCT DESCRIPTION

HDI-P TZ Flush anchors


| Anchor System | | Features and Benefits |
|---------------|-------------------------------|---|
| | Carbon steel HDI-P TZ | Flush anchor anchor with optimized length for reliable fastenings in post-tensioned cable concrete slabs Suitable for uncracked and cracked concrete including seismic areas |
| | Auto-setting tool HDI-P TZ | Productive installation with HDI-P TZ automatic setting tool with hammer drill Used with Hilti Dust Removal System (DRS) for compliance with Table 1 of OSHA 1926.1153 regulations for silica dust exposure Shallow drilling for faster installations |
| | Hand-setting tool HDI-P TZ | Easier installation with Auto Setting Tool Lip provides flush installation, consistent anchor depth, and easier rod alignment Auto Setting Tool includes stop drill bit and setting tool, no tool change necessary |

INSTALLATION PARAMETERS

Table 7 — HDI-P TZ Specifications

| Setting information | rmation Symbol | | | | | |
|---------------------------------|------------------|-------------|---------------|-----|--|--|
| | | | 1/4 | 3/8 | | |
| Nominal bit diameter | d _{bit} | in. | 9/16 | | | |
| Threaded rod diameter | d _{rod} | in. | 3/8 | | | |
| Minimum base material thickness | h _{min} | in. | 1-3/8 | | | |
| Anchor length | ł | in. (mm) | 3/4 (19.1) | | | |
| Hole depth in base material | h _o | in. (mm) | 3/4 (19.1) | | | |
| Minimum anchor spacing | S _{min} | in. | 8 | | | |
| Minimum edge distance | C _{min} | in. | 6 | | | |

Figure 4 — Installation HDI-P TZ in hollow core concrete panels

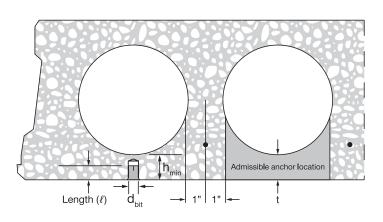

| Nominal Anchor | Longth | Nominal Bit | Allowable lo | ads, Ib (kN) ³ | Ultimate loads lb (kN) | | |
|-------------------|--------------------|--------------|--------------|---------------------------|------------------------|--------|--|
| Diameter (in.) | Length in. (mm) | Diameter in. | Tension | Shear | Tension | Shear | |
| 1/4 | 3/4 | 9/16 | 475 | 475 | 1900 | 1900 | |
| 1/4 | (19.1) | 9/10 | (2.1) | (2.1) | (8.5) | (8.5) | |
| 0.10 | 3/4 | 0/10 | 475 | 700 | 1900 | 2800 | |
| 3/8 | (19.1) | 9/16 | (2.1) | (3.1) | (8.5) | (12.5) | |

Table 8 — Hilti HDI-P TZ loads in hollow core concrete panels^{1,2}

The admissable anchor location must be established to prevent damage to the prestressed cable during the drilling process. Verify the location and height of the cable with the hollow core 1 plank supplier to confirm admissable anchor location. Minimum compressive strength of prestressed concrete is 7,000 psi. Published results represent the average results conducted in local base materials. Due to variations in materials and

2 dimensional configurations, on-site testing is required to determine the actual performance.

3 Allowable loads calculated with a factor of safety of 4.

ORDERING INFORMATION

HDI-P TZ anchor

| Description | Bit diameter (inches) | Qty/box |
|---------------|-----------------------|---------|
| HDI-P TZ 1/4" | 9/16 | 100 |
| HDI-P TZ 3/8" | 9/16 | 100 |

Setting Tools for HDI-P TZ

| Description | Setting Tool Type | Part Number | |
|---------------|-------------------------------------|-------------|---------|
| | Standard Hand Setting Tool | 1 | 2422172 |
| | Grip Hand Setting Tool | 2 | 2421859 |
| HDI-P TZ 1/4" | 2-in-1 Setting Tool | 3 | 2417737 |
| | 2-in-1 Setting Tool Spare Drill Bit | 4 | 2419224 |
| | Stop Drill Bit | 5 | 2419472 |
| | Standard Hand Setting Tool | 1 | 2422180 |
| | Standard Notch Setting Tool | 6 | 2204110 |
| | Grip Hand Setting Tool | 2 | 2422170 |
| HDI-P TZ 3/8" | 2-in-1 Setting Tool | 3 | 2204112 |
| | 2-in-1 Setting Tool Spare Drill Bit | 4 | 2419471 |
| | Stop Drill Bit | 5 | 2419472 |




Open Clip Extraction Head for TE 4/6 DRS

| Description | Setting Tool Type | Legend | Part Number |
|--------------------------------|--------------------------------|------------|-------------|
| HDI-P TZ 1/4" HDI-P TZ 3/8" | Extraction head HKD/HDI TE DRS | \bigcirc | 2154076 |

HIT-HY 270 ANCHORS PRODUCT DESCRIPTION

HIT-HY 270 Adhesive Anchor System

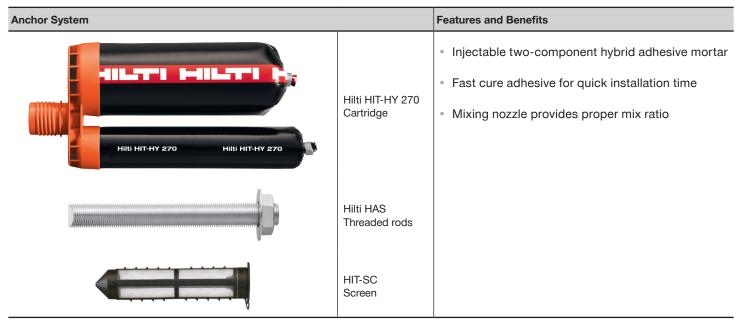

INSTALLATION PARAMETERS

Table 10 — Hilti Installation specifications for HAS threaded rod in hollowcore concrete panels


| Setting information | Symbol | Unit | Nominal anchor size (in) | |
|--------------------------|-------------------|------|--------------------------------|--|
| | | | 3/8 | |
| Nominal bit diameter | d _o | in. | 5/8 | |
| Screen size | HIT-SC | mm. | 16x50 | |
| Depth Drilled | h _o | in. | Through drill | |
| Installation torque | т | ftlb | 2.2 | |
| | T _{inst} | (Nm) | (3) | |
| Diameter of fixture hole | d _h | in. | 7/16 | |

The Admissible Anchor Location must be established to prevent damage to the 1 prestressed cable during the drilling process. Verify the location and height of the cable with the hollow core plank supplier to confirm Admissible Anchor Location.

Minimum compressive strength of hollow core panels is 7,000 psi at the time of installation. 2 The minimum thickness h_{min} is 1-3/8 inches. Allowable loads calculated with a 5:1 factor-of-safety.

3

Figure 5 — Hilti HIT-HY 270 adhesive installed in hollow core concrete^{1,2}

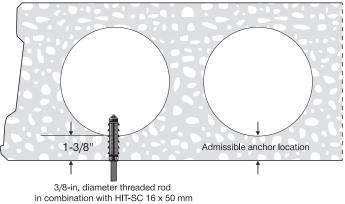

1 Representation of the tested conditions for which allowable adhesive bond loads are applicable. Refer to footnotes of tables 10 and 11 for more information on requirements and restrictions on the admissible anchor installation.

2 Minimum edge distance is 6-inches.

Minimum spacing is:

- 8-inches along the length of each hollow core section.
- One anchor per hollow core section (left and right on page), 6-inches minimum between adjacent hollow core sections.

Table 11 — Hilti HIT-HY 270 loads for threaded rods in hollow core concrete panels^{1,4,5,6,7}

| Nominal Anchor | Effective embedment | | Nominal Bit | Allowable loads, lb (kN) ³ Ultimate loads lb (kN) | | | | | | | |
|----------------------|---------------------|------------------|-----------------|--|-------|-----|-------|-------|--------|-------|--------|
| Diameter (inches) | | mm) ² | Diameter in. | Ten | sion | Sh | ear | Ten | sion | She | ear |
| 3/8 | 2 | (19.1) | 5/8 | 450 | (2.0) | 560 | (2.5) | 2,250 | (10.0) | 2,800 | (12.5) |

1 All values are for anchor installed in hollow core concrete with minimum compressive strength of 7,000 psi. Due to variations in materials and dimensional configurations, on-site testing is required to determine the actual performance of the anchor. Allowable loads are calculated using a safety factor of 5.

2 Tabulated embedment depth is limited by the plastic HIT-SC 16x50 mm screens. See figure 5.

3 The required concrete thickness is the thickness for which values are available and installation is recommended. Anchors shall be installed along the centerline of the hollow core or along the line of minimum thickness. Verify these requirements with the hollow core plank supplier before installation. The required thickness is measured from the inner to the outer side of hollow core panel. See figure 5.

4 Tabulated allowable loads must be the lesser of the adjusted bond values tabulated and the steel values in table 3 of Section 3.2.5 of Hilti Product Technical Guide Volume 2, Ed. 19.

5 Allowable loads shall be adjusted for increased base material temperature in accordance with Figure 6.

6 The adhesive gel and cure times shall be identical to the values adopted for masonry.

7 For combined loading: $(T_{applied} / T_{allowable}) + (V_{applied} / V_{allowable}) \le 1$

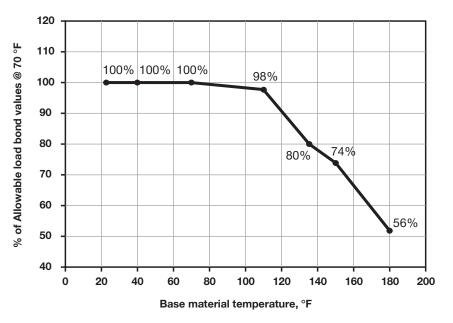


Figure 6 — Influence of in-service base material temperature on bond loads for HIT-HY 270

ORDERING INFORMATION

HIT-HY 270 with mesh screen

| Product Description |
|--------------------------|
| HIT-HY 270 Adhesive |
| HIT-SC 16 x 50 mm screen |
| HAS-E 3/8 threaded rod |

INSTALLATION INSTRUCTIONS

Installation Instructions For Use (IFU) are included with each product package. They can also be viewed or downloaded online at www.hilti.com or www.hilti.ca. Because of the possibility of changes, always verify that downloaded IFU are current when used. Proper installation is critical to achieve full performance. Training is available on request. Contact Hilti Technical Services for applications and conditions not addressed in the IFU.



Hilti, Inc. (U.S.) 1-800-879-8000 en español 1-800-879-5000 www.hilti.com

Hilti (Canada) Corporation 1-800-363-4458 www.hilti.ca